CLUB SERIES SHROUD KIT (52”)

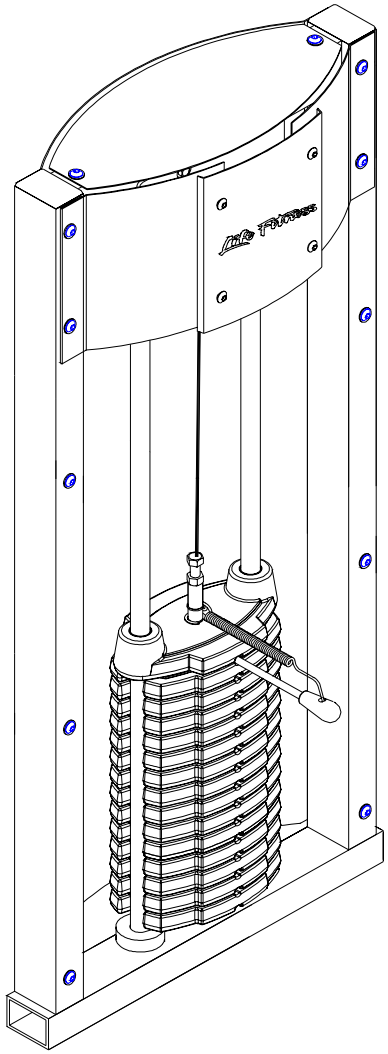

PLEASE USE THESE INSTRUCTIONS FOR THE ASSEMBLY OF THE SHROUD KITS

ASSEMBLY INSTRUCTIONS

PARTS LIST

KEY	PART #	DESCRIPTION	QTY
1	69222	FRONT PARTIAL SHROUD	1
2	69219	REAR PARTIAL SHROUD	1
3	69215	FRONT FULL SHROUD	1
4	69253	REAR FULL SHROUD	1
5	3202408	3/8 X 3-3/4” BUTTON HEAD BOLT	10

KEY	PART #	DESCRIPTION	QTY
6	3228501	3/8” SAE BLK WASHER	22
7	3221501	3/8” ACORN NUT	10
8	3202401	3/8 X 1” BUTTON HEAD BOLT	2
9	6861902	TOP SHROUD	1

Tools Required for Assembly

* 9/16” wrench or rachet
  with 9/16” socket
* 7/32” Allen wrench

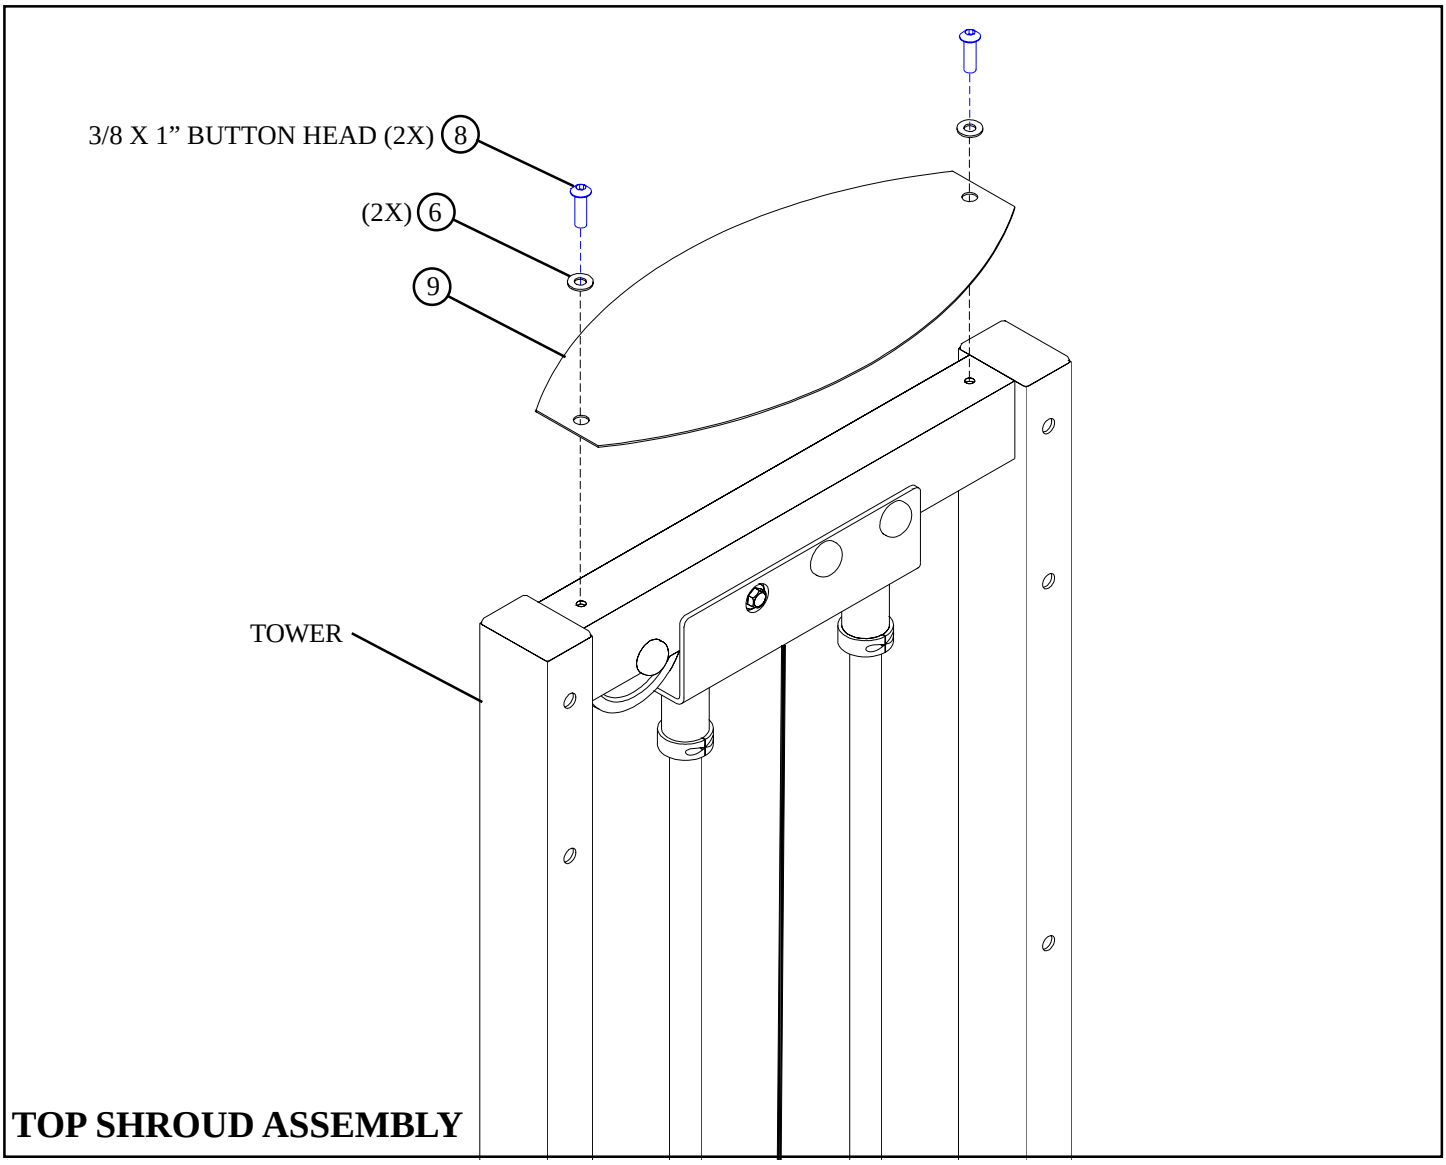

TOP SHROUD ASSEMBLY

- **NOTE: THE TOWER SHOWN IN THESE ASSEMBLY INSTRUCTIONS IS FOR REFERENCE ONLY.**

- **SECURELY** assemble the TOP SHROUD (9) to the TOWER using two 3/8 X 1” BUTTON HEAD BOLTS (8) and two 3/8” SAE BLK WASHERS (6) as shown .

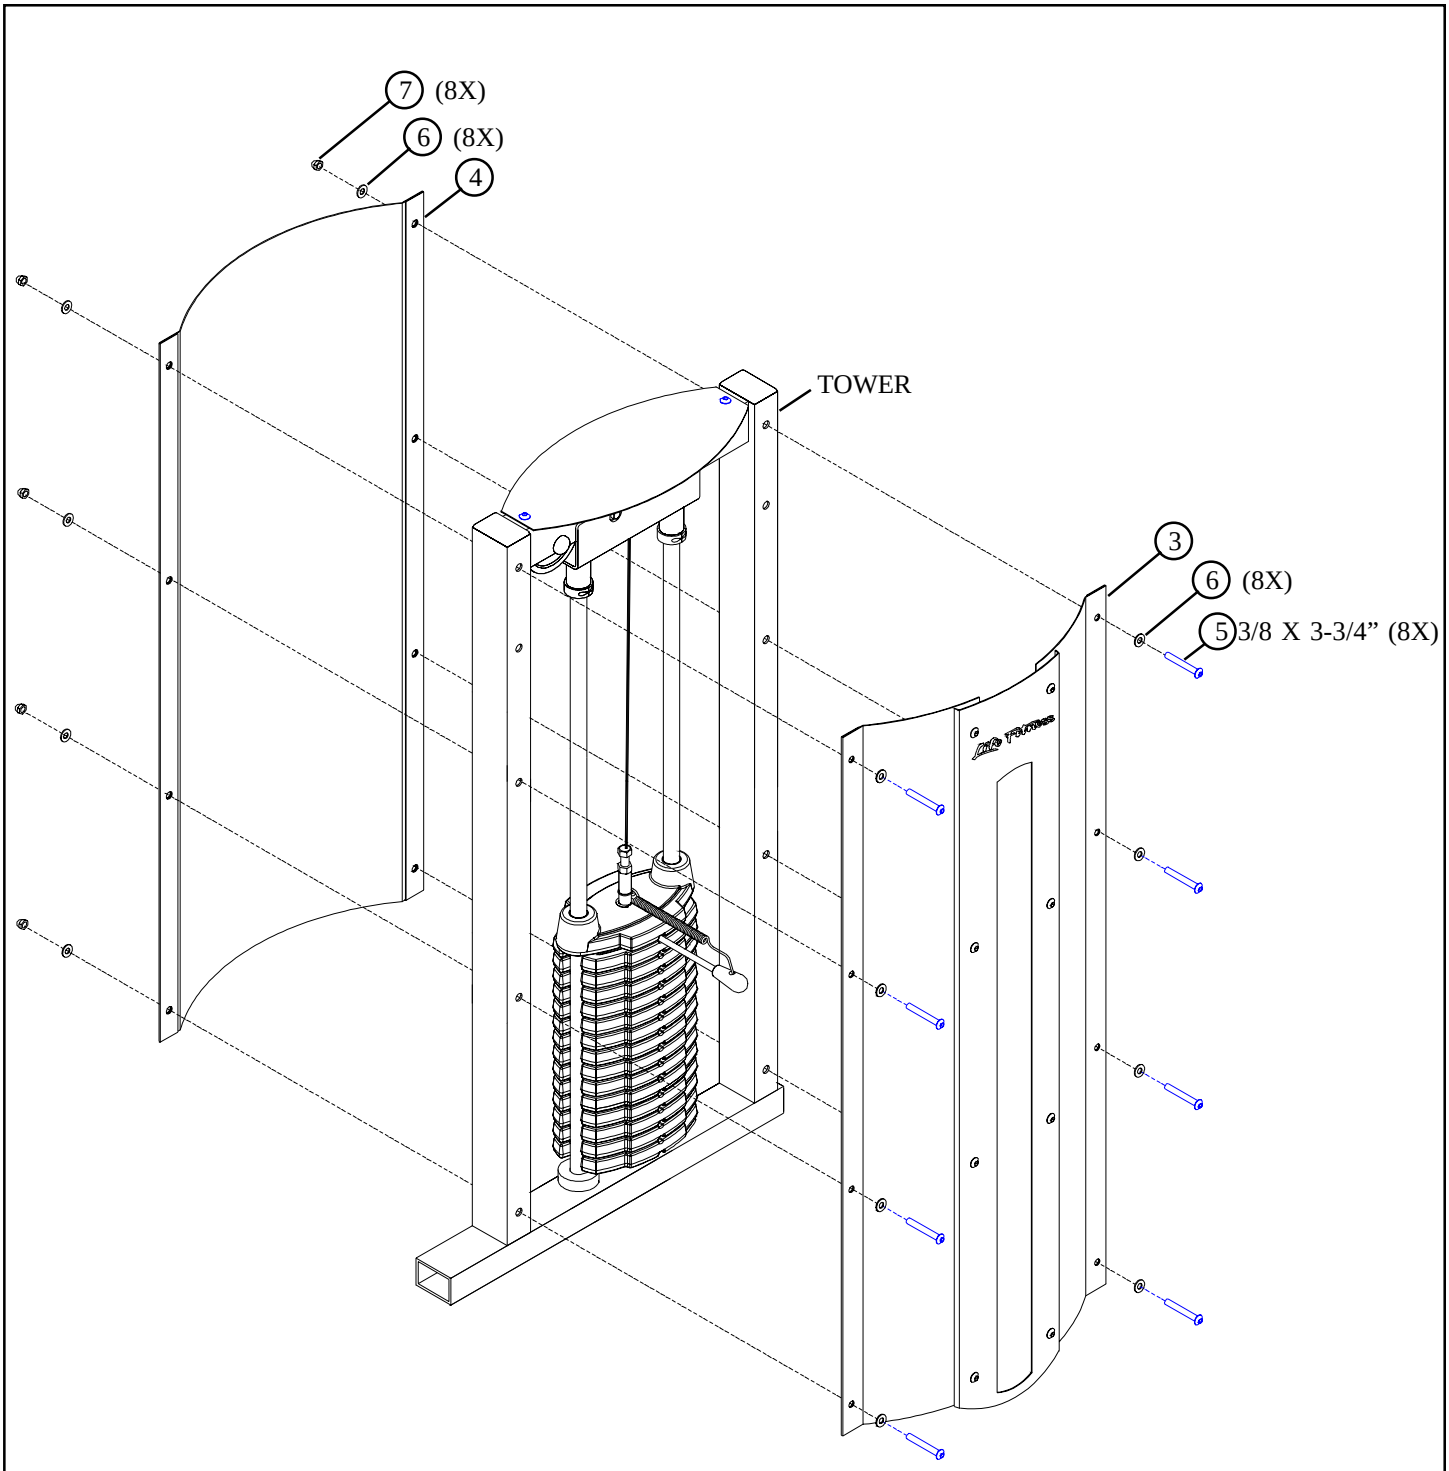

FULL SHROUD ASSEMBLY

- **NOTE: THE TOWER SHOWN IN THESE ASSEMBLY INSTRUCTIONS IS FOR REFERENCE ONLY.**

- **SECURELY** assemble the FRONT FULL SHROUD (3) and the REAR FULL SHROUD (4) to the TOWER using eight 3/8 X 3-3/4” BUTTON HEAD BOLTS (5), sixteen 3/8” SAE BLK WASHERS (6) and eight 3/8” ACORN NUTS (7) as shown above.

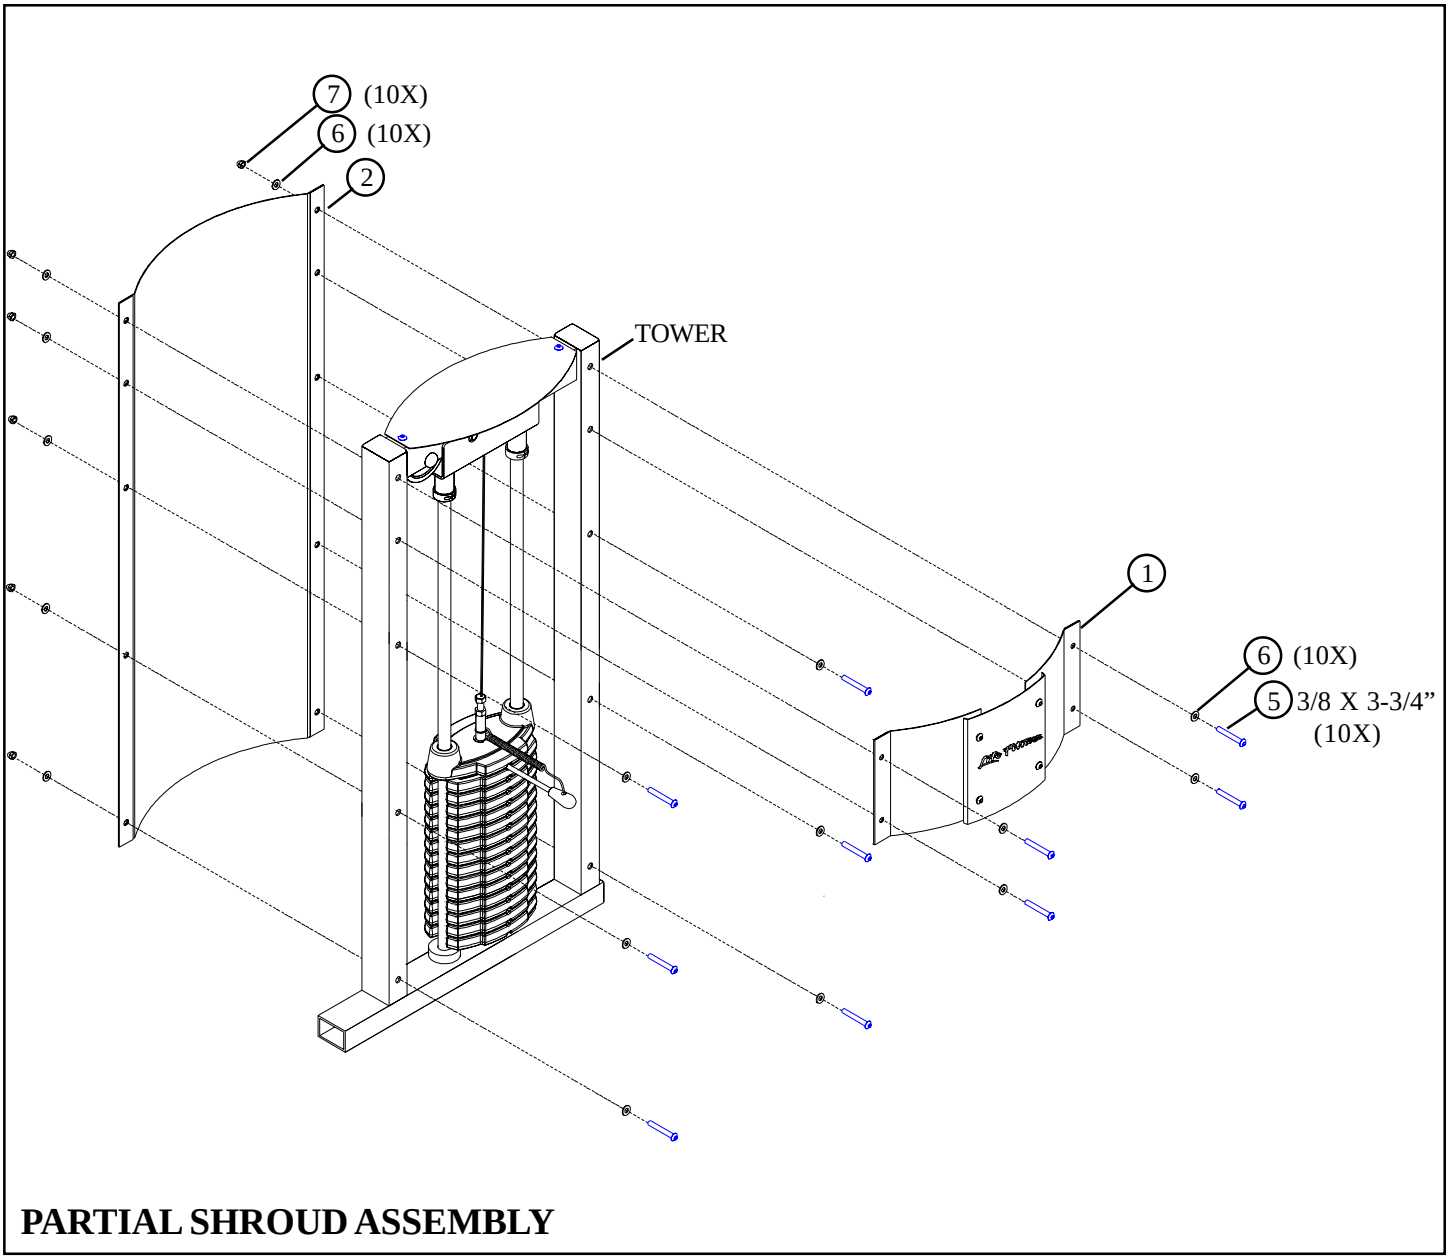

PARTIAL SHROUD ASSEMBLY

- **NOTE: THE TOWER SHOWN IN THESE ASSEMBLY INSTRUCTIONS IS FOR REFERENCE ONLY.**

- **SECURELY** assemble the FRONT PARTIAL SHROUD (1) and the REAR PARTIAL SHROUD (2) to the TOWER using ten 3/8 X 3-3/4” BUTTON HEAD BOLTS (5), twenty 3/8” SAE BLK WASHERS (6) and ten 3/8” ACORN NUTS (7) as shown above.

- **PLEASE RETURN TO THE PRODUCT ASSEMBLY INSTRUCTIONS FOR FURTHER INFORMATION.**